

Апматы (7273)495-231  
 Ангарск (3955)60-70-56  
 Архангельск (8182)63-90-72  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Благовещенск (4162)22-76-07  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Владикавказ (8672)28-90-48  
 Владимир (4922)49-43-18  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
 Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Коломна (4966)23-41-49  
 Кострома (4942)77-07-48  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Курган (3522)50-90-47  
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Ноябрьск (3496)41-32-12  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16  
 Петрозаводск (8142)55-98-37  
 Псков (8112)59-10-37  
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Саранск (8342)22-96-24  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13  
 Сургут (3462)77-98-35  
 Сыктывкар (8212)25-95-17  
 Тамбов (4752)50-40-97  
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
 Томск (3822)98-41-53  
 Тула (4872)33-79-87  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Улан-Удэ (3012)59-97-51  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Чебоксары (8352)28-53-07  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Чита (3022)38-34-83  
 Якутск (4112)23-90-97  
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://laswim.nt-rt.ru/> || [aiv@nt-rt.ru](mailto:aiv@nt-rt.ru)

## HGP-E Series Seawater Pump



### HGP-E SERIES SEAWATER PUMP

HGP-E series pump is new patented large flow self-priming plastic pump, adopts bionic turbo pump body design, maximizes the conversion of motor efficiency to deliver massive & smoothly water flow, max flow rate up to 260m<sup>3</sup>/h. Thickened body and spiral lock design, excellent bearing pressure performance, sturdy and durable. Imported bearings and high-quality mechanical seal, the motor operates more stable and quiet. Flange inlet and outlet, convenient for installation and operation, easy to maintain, all spare parts are available, suitable for seawater condition.

### Features

1. Super water flow up to 260m<sup>3</sup>/h.
2. Four-pole motor, speed: 1450RPM.
3. High-quality mechanical seal, super quiet operation.
4. Protection: IP55.
5. Insulation: Class F.
6. Bionic turbo pump body design.
7. Excellent bearing pressure performance up to 6kg/cm<sup>2</sup>.

Model	Horsepower(H P)	Rated Power (KW)	Voltage(V )	Max. head(m )	Max. flow rate(m <sup>3</sup> /h )	RPM( r/min)	Water inlet size(inch )	Water outlet size(inch)
WL-HGP-E100	10.0	7.5	380V/50Hz	18	170	1450	150mm	125mm
WL-HGP-E150	15.0	11.0	380V/50Hz	18	185	1450	150mm	125mm
WL-HGP-E200	20.0	15	380V/50Hz	18	220	1450	150mm	125mm
WL-HGP-E250	25.0	18.5	380V/50Hz	18	240	1450	150mm	125mm
WL-HGP-E300	30.0	22	380V/50Hz	18	260	1450	150mm	125mm

## KUP Series Seawater Pump



### KUP SERIES SEAWATER PUMP

KUP series is used for water circulation in all kinds of small aquaculture and seawater pond, with enough horsepower and stable operation. The pump is constructed with corrosion resistant and high strength material, with excellent bearing pressure performance up to 6kg/cm<sup>2</sup>. Suitable for all kinds of seawater condition.

#### Features

1. Protection: IP55.
2. Large flow rate.
3. Low noise level.
4. Excellent bearing pressure performance up to 6kg/cm<sup>2</sup>.
5. Shaft: Stainless steel 316.
6. Mechanical seal: Graphite / Ceramic seal.

Model	Horsepower(HP)	Rated Power(KW)	Voltage(V)	Connection size(mm)	Weight(kg)	L(mm)	W(mm)	H(mm)
WL-KUP100	1	0.75	220	50	15.2	598.5	220	370
WL-KUP150	1.5	1.1	220	50	15.6	598.5	220	370
WL-KUP200	2	1.5	220	50	16.0	598.5	220	370

## DPG Series Seawater Pump



### DPG SERIES SEAWATER PUMP

DPG series is used for water circulation in all kinds of large or small aquaculture and seawater pond, with enough horsepower and stable operation. The pump is constructed with corrosion resistant and high strength material, with excellent bearing pressure performance up to 6kg/cm<sup>2</sup>. Suitable for all kinds of seawater condition.

INQUIRY

#### Features

1. With excellent hydraulic design impeller, the water flows more efficiently and the operation is more quiet.
2. With the motor shaft as the pump shaft, the concentricity is absolutely reliable.
3. Imported bearing, low vibration and noise level.
4. Single Stage, end Suction, horizontal centrifugal pump with closed impeller.
5. Coaxial direct structure, high efficiency, small size, light weight, easy installation and maintenance.
6. Mechanical seal, no damage to the axis, no leakage and long service life.
7. Made of double-phase steel, the corrosion resistance is stronger than 316L stainless steel.

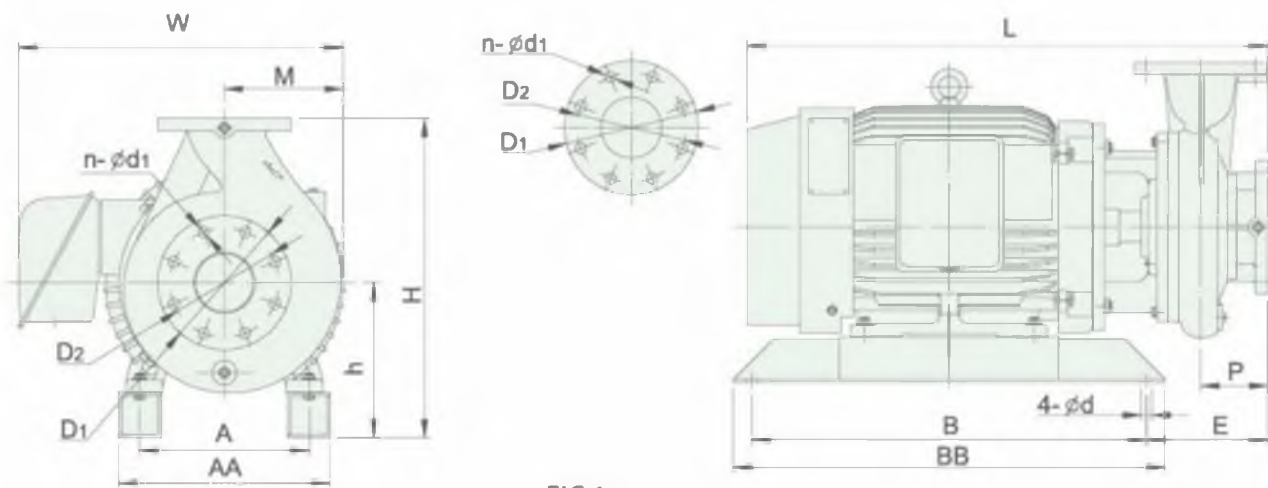


FIG.1

Model	Speed (rpm)	Flow rate (m <sup>3</sup> /h)	Head (m)	Efficiency (%)	Electric power		Net positive suction head (m)	Connection size (mm)	Weight (kg)
					(hp)	(kW)			
WL-DPG-32-50	1450	8.6	16.5	39	2	1.5	2.5	50	63
		10.8	15	44			2.5		
		13.0	14	43			3.0		
WL-DPG-33-50	1450	7.5	21	35	3	2.2	2.5	50	68
		12.5	20	46			2.5		
		15	19.4	45			3.0		
WL-DPG-32-65	1450	18.7	11.8	56	2	1.5	2.5	65	53
		23.4	11	63			2.5		
		28	10.2	62			3.0		
WL-DPG-33-65	1450	18.7	18.3	53	3	2.2	2.5	65	74
		23.4	17	58			2.5		
		28	15.5	52			3.0		
WL-DPG-35-65(1)	1450	20	22	54	5	3.7	2.5	65	105
		25	20	60			2.5		
		30	18.5	59			3.0		
WL-DPG-35-65	1450	17	27	42	5	3.7	2.5	65	105
		21.4	25	47			2.5		
		25.6	22.5	45			3.0		
WL-DPG-37-65	1450	20	33	48	7.5	5.5	2.5	65	130
		25	32	54			2.5		
		30	30.8	53			3.0		

Model	Speed (rpm)	Flow rate (m <sup>3</sup> /h)	Head (m)	Efficiency (%)	Electric power		Net positive suction head (m)	Connection size (mm)	Weight (kg)
					(hp)	(kW)			
WL-DPG-33-80	1450	32	14	56	3	2.2	2.0	80	83
		40	12	63			2.0		
		48	9	62			2.5		
WL-DPG-35-80	1450	37	18.7	59	5	3.7	2.0	80	96
		46.7	17	64			2.0		
		56	16.6	63			2.5		
WL-DPG-37-80	1450	40	22	60	7.5	5.5	2.0	80	109
		50	20	66			2.0		
		60	18	65			2.5		
WL-DPG-310-80	1450	37	30	56	10	7.5	2.0	80	144
		46.7	28	62			2.0		
		56	26.5	61			2.5		
WL-DPG-315-80	1450	40	34.2	60	15	11	2.0	80	188
		50	32	64			2.0		
		60	29	63			2.5		
WL-DPG-35-100	1450	69.2	10.5	66	5	3.7	2.5	100	100
		86.5	9.5	71			2.5		
		103.8	8	70			3.0		
WL-DPG-37-100	1450	69.2	16.6	67	7.5	5.5	2.5	100	126
		89.5	15	73			2.5		
		103.8	13.2	72			3.0		
WL-DPG-310-100	1450	74.8	18.5	69	10	7.5	2.5	100	140
		93.5	17.5	74			2.5		
		112.2	16	73			3.0		
WL-DPG-315-100	1450	72.6	27.2	62	15	11	2.5	100	198
		90.8	25.8	69			2.5		
		109	22.8	68			3.0		
WL-DPG-320-100	1450	80	33.5	67	20	15	2.5	100	227
		100	32	72			2.5		
		120	29.5	71			3.0		
WL-DPG-325-100	1450	72	40	58	25	18.5	2.5	100	320
		90	38	62			2.5		
		108	35.5	61			3.0		
WL-DPG-330-100	1450	76	47	58	30	22	2.5	100	342
		95	44	64			2.5		
		114	38	63			3.0		
WL-DPG-35-150	1450	96	8	67	5	3.7	3.0	150	112
		120	7	73			3.0		
		144	5	72			3.5		
WL-DPG-37-150	1450	108	11	71	7.5	5.5	3.0	150	202
		130	10	75			3.0		
		156	9	74			3.5		
WL-DPG-315-150	1450	107	15	71	10	7.5	3.0	150	151
		134	14	79			3.0		
		160	12.5	78			3.5		

Model	Speed (rpm)	Flow rate (m <sup>3</sup> /h)	Head (m)	Efficiency (%)	Electric power		Net positive suction head (m)	Connection size (mm)	Weight (kg)
					(hp)	(kW)			
WL-DPG-315-150	1450	120	18.5	74	15	11	2.5	150	202
		147	17	81			2.5		
		180	15	80			3.0		
WL-DPG-35-80	1450	120	21.5	75	20	15	2.5	150	232
		160	20	82			2.5		
		192	18	81			3.0		
WL-DPG-37-80	1450	120	30	66	25	18.5	2.5	150	284
		150	28	73			2.5		
		180	25	72			3.0		
WL-DPG-310-80	1450	108	38	69	30	22	3.0	150	322
		130	36	71			3.0		
		156	33	70			3.5		
WL-DPG-315-80	1450	128	34.8	68	30	22	2.5	150	310
		160	32	74			2.5		
		192	28	73			3.0		
WL-DPG-35-100	1450	120	48.5	66	40	30	3.0	150	373
		150	45	72			3.0		
		180	41	71			3.5		
WL-DPG-37-100	1450	133	15	68	15	11	3.0	200	215
		167	14	76			3.0		
		200	13	75			3.5		
WL-DPG-310-100	1450	148	19	72	20	15	2.5	200	237
		185	17	78			2.5		
		222	15	77			3.0		
WL-DPG-315-100	1450	160	21.5	72	25	18.5	2.5	200	308
		200	20	80			2.5		
		240	18	78			3.0		
WL-DPG-320-100	1450	148	31	72	30	22	3.0	200	324
		185	28	78			3.0		
		222	24	77			3.5		
WL-DPG-325-100	1450	136	41	66	40	30	2.5	200	360
		170	38	72			2.5		
		204	34	71			3.0		
WL-DPG-330-100	1450	160	34.6	72	40	30	3.0	200	336
		200	32	79			3.0		
		240	30	78			3.5		
WL-DPG-35-150	1450	144	46.5	69	50	37	3.0	200	532
		180	44	75			3.5		
		216	40.5	73			4.0		
WL-DPG-37-150	1450	176	43	70	50	37	3.0	200	462
		200	40	76			3.5		
		164	36	74			4.0		
WL-DPG-315-150	1450	240	52	72	100	75	4.5	200	782
		300	50	79			4.5		
		400	47	78			5.0		

Model	Speed (rpm)	Flow rate (m <sup>3</sup> /h)	Head (m)	Efficiency (%)	Electric power		Net positive suction head (m)	Connection size (mm)	Weight (kg)
					(hp)	(kW)			
WL-DPG-320-250	1450	240	13	73	20	15	3.0	250	290
		300	12	75			3.5		
		360	10	69			4.0		
WL-DPG-325-250	1450	264	15	75	25	18.5	4.0	250	334
		330	14	78			5.0		
		396	13	77			6.0		
WL-DPG-330-250	1450	288	18	73	30	22	4.0	250	351
		360	16	79			5.0		
		432	14	78			6.0		
WL-DPG-340-250	1450	320	22	74	40	30	3.0	250	416
		400	20	80			3.5		
		480	17	79			5.0		
WL-DPG-350-250	1450	304	28	72	50	37	3.5	250	476
		380	26	78			4.0		
		456	22	77			5.0		
WL-DPG-360-250(1)	1450	264	40	73	60	45	5.0	250	536
		330	35	79			5.0		
		396	28	78			5.5		
WL-DPG-360-250	1450	320	31	72	60	45	3.5	250	536
		400	28	78			4.0		
		480	24	77			5.0		
WL-DPG-375-250(1)	1450	288	43	75	75	55	5.0	250	578
		360	40	80			5.5		
		432	35	79			5.2		
WL-DPG-375-250	1450	320	34.5	75	75	55	5.0	250	578
		400	32	81			5.5		
		480	28.5	80			6.0		
WL-DPG-3100-250	1450	320	56	75	100	75	5.0	250	830
		400	50	81			5.0		
		480	42	80			5.5		
WL-DPG-360-300	1450	500	19.5	74	60	45	5.5	300	623
		600	17	79			5.5		
		700	15	76.5			5.5		
WL-DPG-375-300	1450	480	25	76	75	55	6.0	300	770
		600	23	81			6.0		
		720	20	80			6.0		
WL-DPG-3100-300	1450	528	31	74	100	75	6.0	300	910
		660	28	80			6.0		
		792	25.5	79			6.0		
WL-DPG-3125-300	1450	528	43	75	125	90	5.0	300	1015
		660	40	81			5.0		
		792	33	80			5.5		
WL-DPG-3125-300	1450	576	34	75	125	90	5.0	300	1015
		720	32	80			5.0		
		864	27	79			5.5		

Model	FIG.	A	AA	B	BB	d	E	H	h	L	M	P	W	D1	D2	n-Φd1
WL-DPG-30-25	1	112	159	250	290	14	92	221	101	341.5	86	60	216	15	85	4-Φ14
WL-DPG-31-40	1	125	177	290	342	14	86.5	240	110	371	95.5	65	242	150	110	4-Φ18
WL-DPG-32-40	1	140	192	290	342	14	104.5	250	120	408	103.5	65	268	150	110	4-Φ18
WL-DPG-31-50	1	125	177	290	342	14	86.5	240	110	371	95.5	65	242	150	125	4-Φ18
WL-DPG-32-50	1	140	192	290	342	14	125.5	260	120	429	104	80	268	165	125	4-Φ18
WL-DPG-33-50	1	140	210	290	340	14	142.5	345	165	446	132	92	296	165	125	4-Φ18
WL-DPG-35-50	1	190	252	390	436	18	125	325	145	502.5	132	92	312	165	125	4-Φ18
WL-DPG-37-50	1	216	278	390	436	18	138	345	165	544	143	92	355	165	125	4-Φ18
WL-DPG-310-50	1	216	266	390	450	14	168	387	187	575	157	100	381	185	125	4-Φ18
WL-DPG-32-65	1	140	192	290	342	14	125.5	280	120	429	110	80	275	185	145	4-Φ18
WL-DPG-33-65	1	140	192	290	342	14	125.5	325	145	429	110	90	275	185	145	4-Φ18
WL-DPG-36-65	1	190	252	390	436	18	125	367	187	503	132	92	312	185	145	4-Φ18
WL-DPG-37-65	1	216	278	390	436	18	138	345	165	544	143	92	356	185	145	4-Φ18
WL-DPG-310-65	1	216	278	390	436	18	153	345	165	559	142	92	353	185	145	4-Φ18
WL-DPG-315-65	1	254	324	500	560	18	166	460	235	696	161	100	436	185	145	4-Φ18
WL-DPG-320-65	1	254	324	500	560	18	166	460	235	696	161	100	436	185	145	4-Φ18
WL-DPG-33-80	1	140	192	290	342	14	151.5	280	120	455	127	100	291	200	160	8-Φ18
WL-DPG-35-80	1	190	252	390	436	18	134	305	145	511.5	128	100	308	200	160	8-Φ18
WL-DPG-37-80	1	216	278	390	436	18	153	385	165	559	148	100	361	200	160	8-Φ18
WL-DPG-310-80	1	216	278	390	436	18	168	385	165	574	148	100	359	200	160	8-Φ18
WL-DPG-315-80	1	254	324	500	560	18	166	455	235	696	173	100	448	200	160	8-Φ18
WL-DPG-320-80	1	254	324	500	560	18	166	495	235	696	173	100	448	200	160	8-Φ18
WL-DPG-325-80	1	254	324	500	560	18	247	495	235	800	173	100	448	200	160	8-Φ18
WL-DPG-330-80	1	279	349	580	640	18	201.5	525	255	816.5	199	100	539	200	160	8-Φ18
WL-DPG-340-80	1	279	349	650	710	18	202.2	545	255	861	204	110	544	220	160	8-Φ16
WL-DPG-350-80	1	318	388	650	710	18	226.5	575	275	926	214	110	579.5	220	160	8-Φ18
WL-DPG-35-100	1	190	260	290	340	14	193	367	187	520.5	148	100	328	220	180	8-Φ18
WL-DPG-37-100	1	216	278	390	436	18	156	345	165	562	148	100	361	220	180	8-Φ18
WL-DPG-310-100	1	216	278	390	436	18	171	345	165	577	148	100	359	220	180	8-Φ18
WL-DPG-315-100	1	254	324	500	560	18	169	460	235	699	161	100	436	220	180	8-Φ18
WL-DPG-320-100	1	254	324	500	560	18	169	460	235	699	161	100	436	220	180	8-Φ18
WL-DPG-325-100	1	254	324	500	560	18	269	505	235	822	192	110	467	220	180	8-Φ18
WL-DPG-330-100	1	279	349	580	640	18	217.5	525	255	832.5	199	110	539	220	180	8-Φ18
WL-DPG-340-100	1	279	349	650	710	18	199.5	525	255	858	196	110	536	220	180	8-Φ18
WL-DPG-350-100	1	318	388	650	710	18	226.5	565	275	926	204	110	568	220	180	8-Φ18
WL-DPG-360-100	1	318	388	650	710	18	226.5	565	275	926	205	110	569	220	180	8-Φ18
WL-DPG-375-100	1	356	456	750	810	24	175	632	332	935	245	110	640	220	180	8-Φ18
WL-DPG-340-150	1	279	349	650	710	18	227.5	535	255	886	206	140	546	285	240	8-Φ22
WL-DPG-350-150	1	318	388	650	710	18	251.5	555	275	951	206	140	571	285	240	8-Φ22
WL-DPG-360-150	1	318	388	650	710	18	251.5	555	275	951	206	140	571	285	240	8-Φ22
WL-DPG-375-150	1	356	456	750	810	24	206	632	332	966	245	140	640	285	240	8-Φ22
WL-DPG-3100-150	1	406	506	750	810	24	237.5	657	357	1059.5	255	140	785	285	240	8-Φ22

Model	FIG.	A	AA	B	BB	d	E	H	h	L	M	P	W	D1	D2	n-Φd1
WL-DPG-32-50	1	140	203	290	340	14	154.5	397	197	473.5	157	100	314	185	125	4-Φ14
WL-DPG-33-50	1	160	230	290	340	14	183	375	175	509.5	157	100	336	185	125	4-Φ18
WL-DPG-32-65	1	140	210	290	340	14	139.5	345	165	443	132	92	302	185	145	4-Φ18
WL-DPG-33-65	1	160	230	290	340	14	183	400	175	503	161	100	325	185	145	4-Φ18
WL-DPG-35-65(1)	1	190	253	290	340	14	192	469	219	515	180	100	366	200	145	4-Φ18
WL-DPG-35-65	1	190	253	290	340	14	192	469	219	515	180	100	366	200	145	4-Φ18
WL-DPG-37-65	1	216	286	390	440	14	174	467	207	580	194	100	411	200	145	4-Φ18
WL-DPG-33-80	1	160	230	290	340	14	183	435	175	503	173	100	337	200	160	8-Φ18
WL-DPG-35-80	1	190	260	390	440	14	140	447	187	513	173	100	359	200	160	8-Φ18
WL-DPG-37-80	1	216	286	390	440	14	180	477	207	580	192	100	409	200	160	8-Φ18
WL-DPG-310-80	1	216	286	390	450	14	193	497	207	618	201	100	418	200	160	8-Φ18
WL-DPG-315-80	1	254	324	500	560	18	172	525	235	702	201	100	476	200	160	8-Φ18
WL-DPG-35-100	1	190	260	390	440	14	160	457	187	535	192	110	378	220	180	8-Φ18
WL-DPG-37-100	1	216	286	390	440	14	190	477	207	596	192	110	409	220	180	8-Φ18
WL-DPG-310-100	1	216	286	390	440	14	209	477	207	634	192	110	409	220	180	8-Φ18
WL-DPG-315-100	1	254	324	500	560	18	191	535	235	721	214	110	490	220	180	8-Φ18
WL-DPG-320-100	1	254	324	500	560	18	213	535	235	765	214	110	490	220	180	8-Φ18
WL-DPG-325-100	1	279	359	580	640	18	220.5	652	312	831	256	110	560	220	180	8-Φ18
WL-DPG-330-100	1	279	359	580	640	18	220.5	652	312	831	256	110	560	220	180	8-Φ18
WL-DPG-35-150	1	190	253	390	450	14	190	499	219	563	206	140	392	285	240	8-Φ22
WL-DPG-37-150	1	216	286	390	450	14	218	487	207	624	206	140	423	285	240	8-Φ22
WL-DPG-310-150	1	216	286	390	450	14	237	487	207	662	206	140	423	285	240	8-Φ22
WL-DPG-315-150	1	254	324	500	560	18	216	515	235	746	206	140	481	285	240	8-Φ22
WL-DPG-320-150	1	254	324	500	560	18	244	535	235	796	227	140	503	285	240	8-Φ22
WL-DPG-325-150	1	279	349	580	640	18	243	605	255	858	249	125	589	285	240	8-Φ22
WL-DPG-330-150(1)	1	279	359	580	640	18	259	667	287	874	268	140	608	285	240	8-Φ22
WL-DPG-330-150	1	279	349	580	640	18	243	605	255	858	249	125	590	285	240	8-Φ22
WL-DPG-340-150	1	279	359	650	710	18	241	667	287	899	268	140	608	285	240	8-Φ22
WL-DPG-315-200	1	254	324	500	560	18	254	535	235	784	241	160	516	340	295	8-Φ22
WL-DPG-320-200	1	254	324	500	560	18	276	535	235	828	241	160	516	340	295	8-Φ22
WL-DPG-325-200	1	279	359	580	640	18	284	607	287	898.5	255	160	595	340	295	8-Φ22
WL-DPG-330-200	1	279	359	580	640	18	284	647	287	898.5	268	160	608	340	295	8-Φ22
WL-DPG-340-200(1)	1	279	359	650	710	18	266	678	287	924	286	160	626	340	295	8-Φ22
WL-DPG-340-200	1	279	359	650	710	18	266	647	287	924	268	160	608	340	295	8-Φ22
WL-DPG-350-200(1)	1	318	398	650	710	18	290	697	307	989	287	160	652	340	295	8-Φ22
WL-DPG-350-200	1	318	398	650	710	18	290	697	307	989	287	160	652	340	295	8-Φ22
WL-DPG-3100-200	1	460	500	600	790	24	204.5	926	486	1153.5	321	200	852	340	295	8-Φ22
WL-DPG-320-250	1	254	334	580	640	18	291	647	267	883	303	205	580	395	350	12-Φ22
WL-DPG-325-250	1	279	359	580	640	18	338.5	667	287	953.5	304	205	644	395	350	12-Φ22
WL-DPG-330-250	1	279	359	580	640	18	338.5	667	287	953.5	304	205	644	395	350	12-Φ22
WL-DPG-340-250	1	279	359	650	710	18	326	762	312	984	331	200	671	395	350	12-Φ22
WL-DPG-350-250	1	318	398	650	710	18	350	757	307	1049	331	200	696	395	350	12-Φ22
WL-DPG-360-250(1)	2	360	400	550	735	18	212	865	415	1049	318	200	683	395	350	12-Φ22
WL-DPG-360-250	2	360	400	550	735	18	212	865	415	1049	318	200	683	395	350	12-Φ22
WL-DPG-375-250(1)	2	410	450	550	730	18	203	865	415	1058	319	200	714	395	350	12-Φ22
WL-DPG-375-250	2	410	450	550	730	18	203	865	415	1058	319	200	714	395	350	12-Φ22
WL-DPG-3100-250	2	460	500	600	790	24	204.5	986	486	1154	360	200	890	395	350	12-Φ22
WL-DPG-360-300	1	410	450	550	750	18	257	970	450	1099	378	230	743	445	400	12-Φ23
WL-DPG-375-300	2	410	450	550	735	19	258	975	455	1108	381	230	776	445	400	12-Φ22
WL-DPG-3100-300	2	460	500	600	810	24	252.5	1006	486	1202	381	230	911	445	400	12-Φ22
WL-DPG-3125-300(1)	2	540	580	680	875	24	285.5	1096	516	1241	383	230	913	445	400	12-Φ22
WL-DPG-3125-300	2	540	580	680	890	24	303.5	1012	492	1259	381	230	911	445	400	12-Φ23



Апматы (7273)495-231  
 Ангарск (3955)60-70-56  
 Архангельск (8182)63-90-72  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Благовещенск (4162)22-76-07  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Владикавказ (8672)28-90-48  
 Владимир (4922)49-43-18  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
 Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Коломна (4966)23-41-49  
 Кострома (4942)77-07-48  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Курган (3522)50-90-47  
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Ноябрьск (3496)41-32-12  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16  
 Петрозаводск (8142)55-98-37  
 Псков (8112)59-10-37  
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Саранск (8342)22-96-24  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13  
 Сургут (3462)77-98-35  
 Сыктывкар (8212)25-95-17  
 Тамбов (4752)50-40-97  
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
 Томск (3822)98-41-53  
 Тула (4872)33-79-87  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Улан-Удэ (3012)59-97-51  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Чебоксары (8352)28-53-07  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Чита (3022)38-34-83  
 Якутск (4112)23-90-97  
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://laswim.nt-rt.ru/> || [aiv@nt-rt.ru](mailto:aiv@nt-rt.ru)

## KAP Series Seawater Pump



### KAP SERIES SEAWATER PUMP

KAP series seawater pump is with simple design, easy to install and maintain. Adopts special impeller for greater suction efficiency. The body is constructed of special materials, with excellent bearing pressure performance up to 6kg/cm<sup>2</sup>. Suitable for all kinds of aquaculture ponds and seawater ponds.

#### Features

1. Protection: IP55.
2. Large flow rate.
3. Low noise level.
4. Excellent bearing pressure performance up to 6kg/cm<sup>2</sup>.
5. Shaft: Stainless steel 316.
6. Mechanical seal: Graphite / Ceramic seal.

Model	Horsepower(HP)	Rated Power(KW)	Voltage(V)	Connection size(m m)	Weight(kg)	L(m m)	W(m m)	H(m m)
WL-KAP150	1.5	1.1	220	63	20.8	700	221	378
WL-KAP200	2	1.5	220	63	22.0	700	221	378
WL-KAP300	3	2.2	220/380	63	24.0	700	221	378
WL-KAP350	3.5	2.6	220/380	63	25.0	700	221	378